


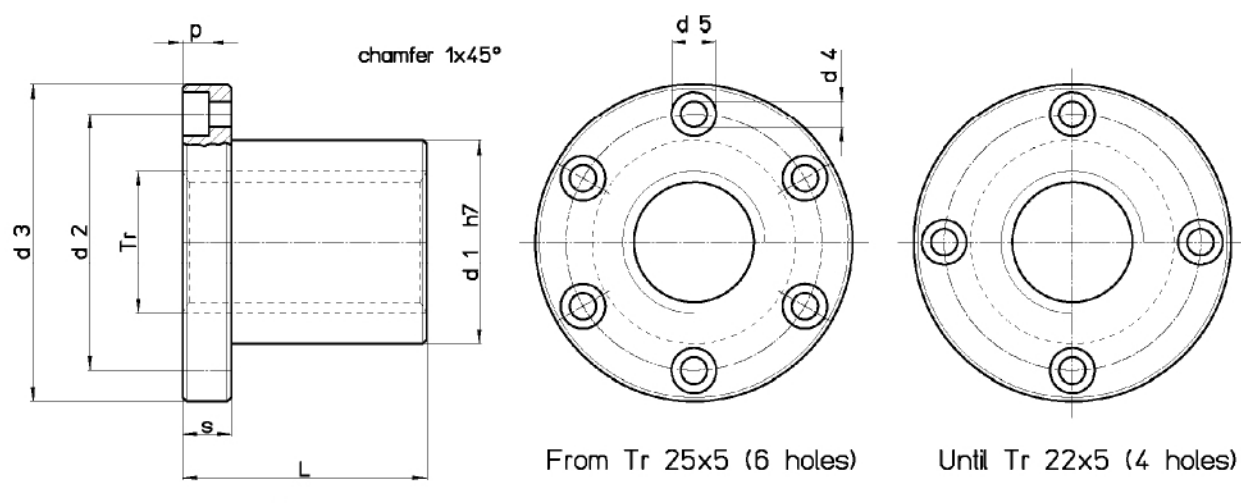

Diameter X lead	Thread starts	d1 mm	d2 mm	d3 mm	d4 mm	d5 mm	p mm	L mm	s mm	no. screw holes	Fastening screws (class 8.8)	Wt. kg/each	At mm ² (1)
Tr 10x3	1	18	26	37	4.5	7.5	4.2	22	8	4	M4	0.088	294
Tr 12x3	1	18	26	37	4.5	7.5	4.2	22	8	4	M4	0.082	362
Tr 14x4	1	20	30	42	5.5	9.5	5.2	25	10	4	M5	0.123	470
Tr 16x4	1	22	32	45	5.5	9.5	5.2	30	10	4	M5	0.149	660
Tr 18x4	1	25	35	48	5.5	9.5	5.2	35	10	4	M5	0.188	880
Tr 20x4	1	30	40	52	5.5	9.5	5.2	40	10	4	M5	0.267	1130
Tr 22x5	1	30	40	52	5.5	9.5	5.2	40	10	4	M5	0.247	1225
Tr 25x5	1	35	48	62	6.5	11	6.5	45	12	6	M6	0.393	1590
Tr 28x5	1	40	53	68	6.5	11	6.5	50	12	6	M6	0.532	2000
Tr 30x3	1	40	53	68	6.5	11	6.5	50	12	6	M6	0.482	2238
Tr 30x4	1	40	53	68	6.5	11	6.5	50	12	6	M6	0.487	2200
Tr 30x5	1	40	53	68	6.5	11	6.5	50	12	6	M6	0.492	2160
Tr 30x6	1	40	53	68	6.5	11	6.5	50	12	6	M6	0.497	2120
Tr 35x3	1	50	63	78	8.5	14	8.5	60	15	6	M8	0.862	3160
Tr 35x4	1	50	63	78	8.5	14	8.5	60	15	6	M8	0.869	3110
Tr 35x5	1	50	63	78	8.5	14	8.5	60	15	6	M8	0.876	3060
Tr 35x6	1	50	63	78	8.5	14	8.5	60	15	6	M8	0.883	3015
Tr 35x8	1	50	63	78	8.5	14	8.5	60	15	6	M8	0.898	2920
Tr 40x3	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.030	3930
Tr 40x4	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.039	3880
Tr 40x5	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.048	3828
Tr 40x6	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.057	3778
Tr 40x7	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.066	3727
Tr 40x8	1	55	68	84	8.5	14	8.5	65	15	6	M8	1.075	3675
Tr 45x8	1	55	72	90	8.5	14	8.5	65	15	6	M8	0.999	4186
Tr 50x3	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.679	6095
Tr 50x4	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.693	6030
Tr 50x5	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.707	5970
Tr 50x6	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.721	5905
Tr 50x8	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.749	5780
Tr 55x9	1	65	80	100	10.5	17	10.5	80	20	6	M10	1.475	6345
Tr 60x6	1	75	95	120	12.5	19	12.5	100	25	6	M12	2.865	8950
Tr 60x7	1	75	95	120	12.5	19	12.5	100	25	6	M12	2.886	8875
Tr 60x9	1	75	95	120	12.5	19	12.5	100	25	6	M12	2.927	8718